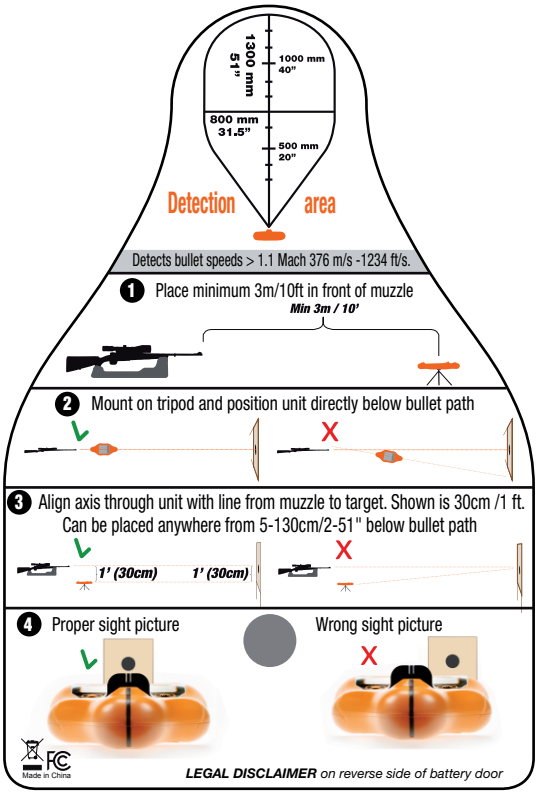
1300 mm
51"
1000 mm
40"
800 mm
31.5"
500 mm
20"
Detection
area
Detects bullet speeds > 1.1 Mach 376 m/s -1234 ft/s.
1 Place minimum 3m/10ft in front of muzzle
Min 3m / 10'
2 Mount on tripod and position unit directly below bullet path
3 Align axis through unit with line from muzzle to target. Shown is 30cm /1 ft.
Can be placed anywhere from 5-130cm/2-51" below bullet path
1' (30cm)
1' (30cm)
4 Proper sight picture
Wrong sight picture
Made in China
LEGAL DISCLAIMER on reverse side of battery door